

BULLARD ABRASIVES®

ALL NEW!

100% MORE AGGRESSIVE

Unique product design combines the toughness of a grinding wheel and the rapid material removal of a resin fibre disc. Superior ergonomic modified Type-29 angle design provides greater disc contact area on work surface than competitors providing the best solution when safety, speed and material removal is your primary goal.

Removes 35 to 45 gpm, depending on grit size versus a conventional grinding wheel of 12 to 15 gpm.

70% LIGHTER

Reduced vibration through lightweight construction allows for an enhanced grinding experience and less operator fatigue.

Since 1927
Made In The USA
ISO 9001: 2015 Certified

PREMIUM CERAMIC DISC **RapidGRIND™**

Rough grinding to weld blending and everything in between



RapidGRIND™

ALL NEW!

●● SGA MAX FORCE+

PART#	MAX RPM	DIMENSIONS	GRIT	QTY
30423	13,300	4½ x 7/8	36	10
30433	13,300	4½ x 5/8-11	36	10
30425	13,300	4½ x 7/8	50	10
30435	13,300	4½ x 5/8-11	50	10
30523	12,200	5 x 7/8	36	10
30533	12,200	5 x 5/8-11	36	10
30525	12,200	5 x 7/8	50	10
30535	12,200	5 x 5/8-11	50	10

STAINLESS STEEL/CARBON STEEL
Contaminant-FREE Fe + S + Cl < 0.1%

CHOOSE YOUR FINISH:

- 36 Grit: Best combination of stock removal and surface finish
- 50 Grit: Less emphasis on aggression with refined surface finish and depth of scratch

TARGET CUSTOMERS:

- Power Plants
- Structural Metal Fabrication
- A/C and Duct Work • Storage Tanks
- Architectural Metal Work
- Foundries • Construction Sites

FEATURES = BENEFITS

- State-of-the-Art Ceramic Grain = Self-Sharpening - Maintains Rate-of-Cut for Cool Grinding
- No Back-Up Pad Required = Quickly Mount to Angle Grinder
- Modified Type-29 Shape = Enhanced Disc Life and Surface Contact Area
- Safe = Exceeds ANSI B7.1 and International Safety Standards
- User-Friendly = Rugged Yet Lightweight Construction
- Vibration-Free Performance = Reduces Noise and Operator Fatigue
- Superior Ergonomic Design Delivers Ease of Use - Unparalleled Productivity = Up to 50% Reduction in Process Time




FLANGE ADAPTOR*

- Reusable, Rugged, All Steel Construction
- Allows for flat angle grinding with little or no interference of the spindle for enlarged surface contact area
- Versatile: To be used on 7/8" arbor holes with 4-1/2" and 5" angle grinders with 5/8-11 spindles to quickly mount grinding and thin cutting wheels (Type 1 and/or Type 27)
- Efficient: Unique flange adaptor allows flat angle grinding utilizing the complete disc surface to get your money's worth



APPLICATIONS:

- Weld bead removal
- Surface grinding
- Edge grinding and deburring
- Chamfering and beveling
- Flame-cut steel removal

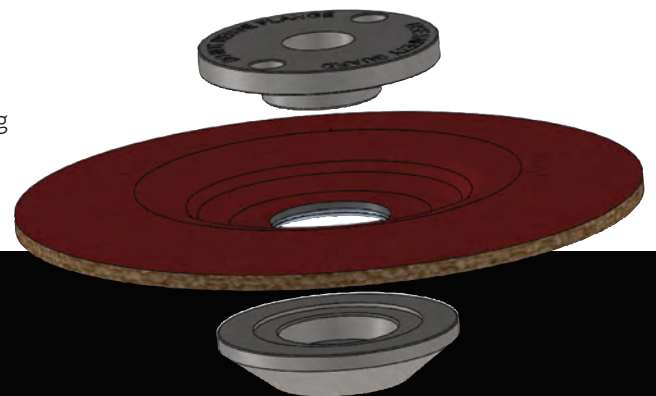

BULLARD ABRASIVES®

MAX FORCE+ + MAX FORCE+ RapidGRIND™ wheels utilize the latest ceramic abrasive technology for maximum service life with cool and rapid material removal. RapidGRIND™ wheels represent the pinnacle of performance and value in product applications.

SAFETY AND PROPER USE:

- Use on work surface with the face of the disc only
- Not to be used on the outer edge as a cutting wheel
- Always use the tool safety guard
- Always wear face and body protection during use
- Never exceed the maximum safe speed marked on the disc
- Always comply with ANSI B7.1 and OSHA operating regulations

surfaces be warned...